

CRACK INJECTION

ARDEX RA 142

Super Low Viscosity Structural Concrete Crack Injection Epoxy

ARDEX RA 142 is a Super Low Viscosity, two-component epoxy adhesive perfect for gravity-feed and pressure injection repair of hairline to fine width horizontal cracks. It can be used in temperatures between 10° to 35°C for a variety of repair projects including vertical crack repair using injection ports in conjunction with a capping paste. Its bonding and sealing capabilities for interior and exterior slabs are exceptional. It can also be used as an epoxy mortar for spall repair when mixed with aggregate.

LOCATION

Interior/External

SUBSTRATES

Almost any material

COVERAGE

Coverage varies

COLOURS

Amber tint

DRYING AND CURING

Fully cured in 24 hours.

VOC CONTENT

Low


PACKAGING

470mL dual cartridge



ARDEX RA 142 QUICK FACTS

- Very thin liquid for superior crack penetration
- 100% solids, solvent free system with low VOC content
- Epoxy resin binder for epoxy mortar patching and overlay of interior surface using addition of aggregate

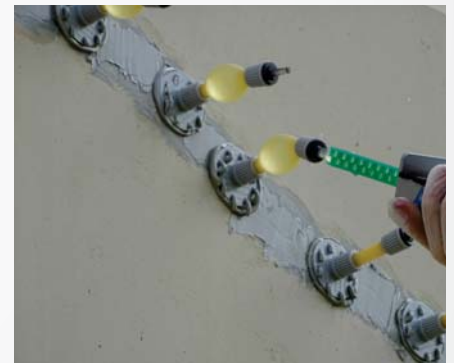

CONTACT US

1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEMARDEX
PREMIUM PERFORMANCE